







## 95027324 SQF 0.6-2 50 Hz



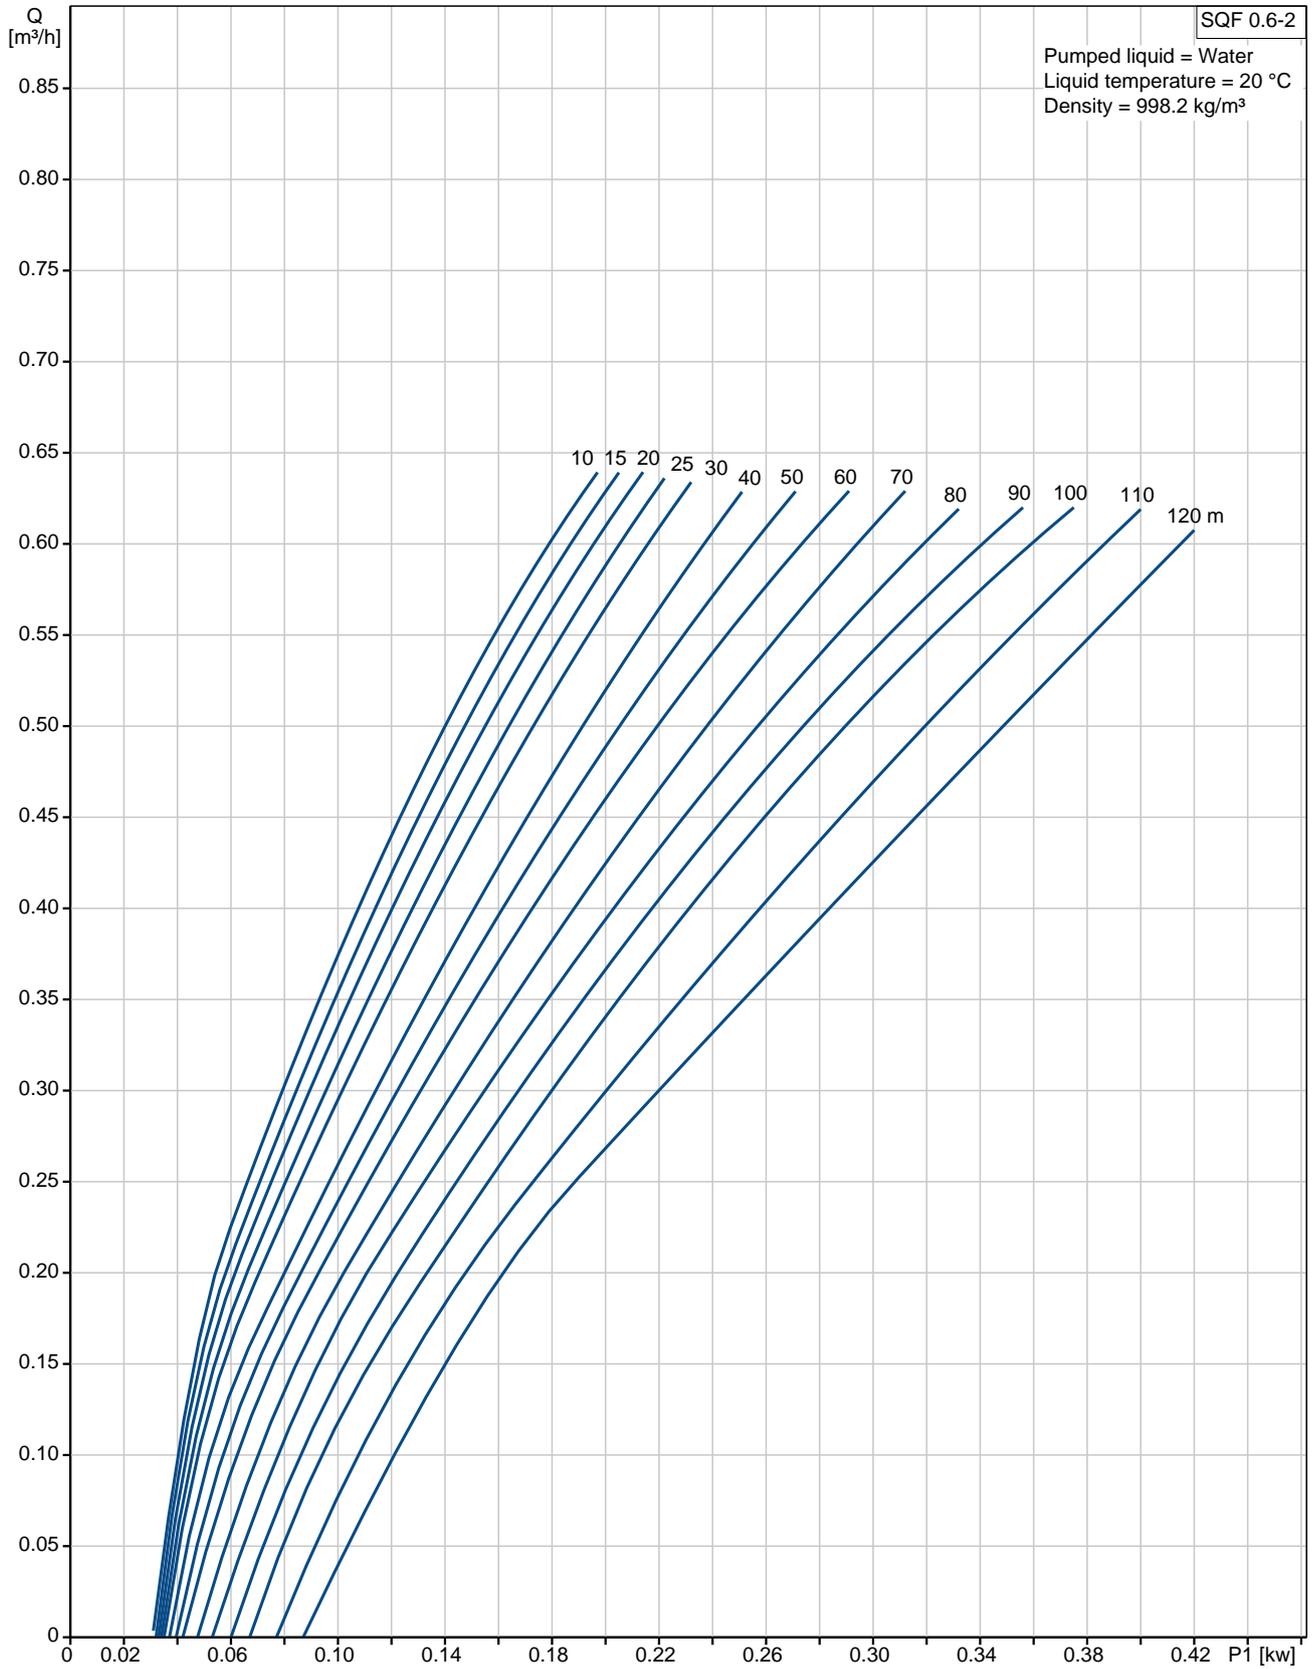


Company name: -  
 Created by: -  
 Phone: -  
 Fax: -  
 Date: -

Description	Value
<b>General information:</b>	
Product name:	SQF 0.6-2
Position:	
Product No:	95027324
EAN number:	5700834791574
Price:	On request
<b>Technical:</b>	
Approvals on motor nameplate:	CE, CTICK, TR_MARK
Pump No:	95027405
Stages:	2
Valve:	pump with built-in non-return valve
<b>Materials:</b>	
Pump:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	DIN W.-Nr. 1.4301
Rotor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Stator:	Stainless steel / EPDM DIN W.-Nr. 1.4301 AISI 304
<b>Installation:</b>	
Maximum ambient pressure:	15 bar
Pump outlet:	Rp 1 1/4
Minimum borehole diameter:	76 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Maximum liquid temperature:	40 °C
Liquid temp:	20 °C
Density:	998.2 kg/m <sup>3</sup>
Kinematic viscosity:	1 mm <sup>2</sup> /s
<b>Electrical data:</b>	
Motor type:	MSF3
Power input - P1:	1.4 kW
Rated voltage ac:	1 x 90-240 V
Rated voltage dc:	30-300 V
Start. method:	direct-on-line
Rated current:	8.4 A
Power factor:	1,0
Rated speed:	500-3600 rpm
Enclosure class (IEC 34-5)::	IP68
Insulation class (IEC 85):	F
Motor protec:	Y
Thermal protec:	internal
Length of cable:	2 m
Motor No:	96275336
<b>Others:</b>	
Minimum efficiency index, MEI :	--
Net weight:	7.6 kg
Gross weight:	9.4 kg
Shipping volume:	0.024 m <sup>3</sup>
Sales region:	Europe/South America/Japan

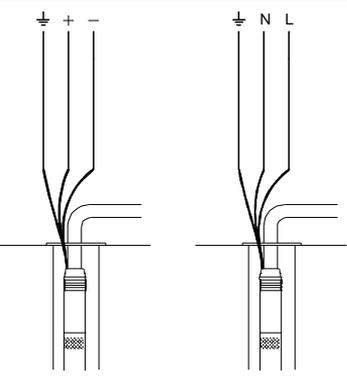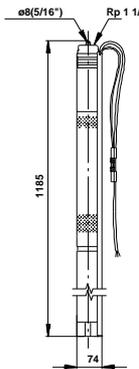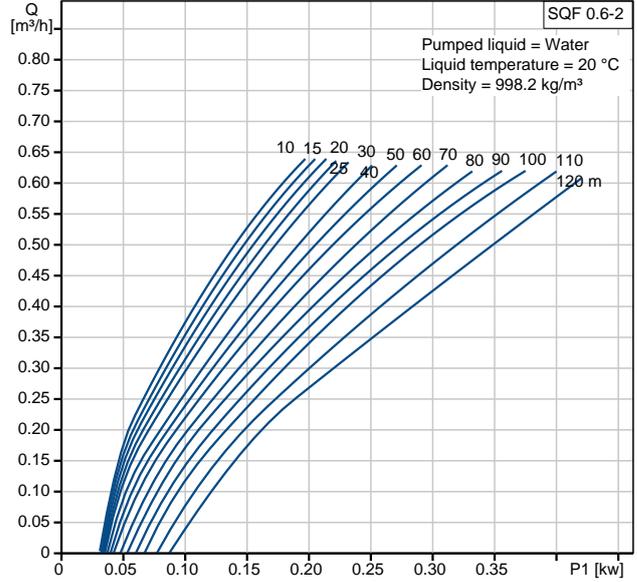





**95027324 SQF 0.6-2 50 Hz**

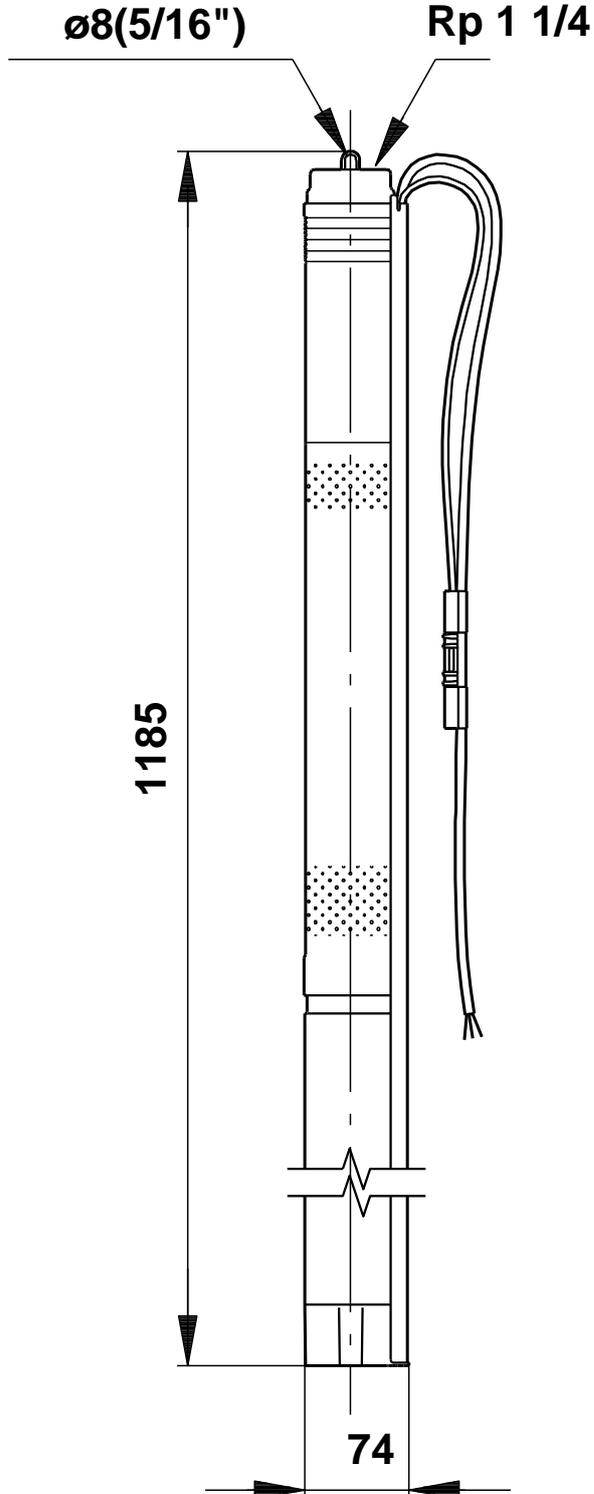

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



**95027324 SQF 0.6-2 50 Hz**

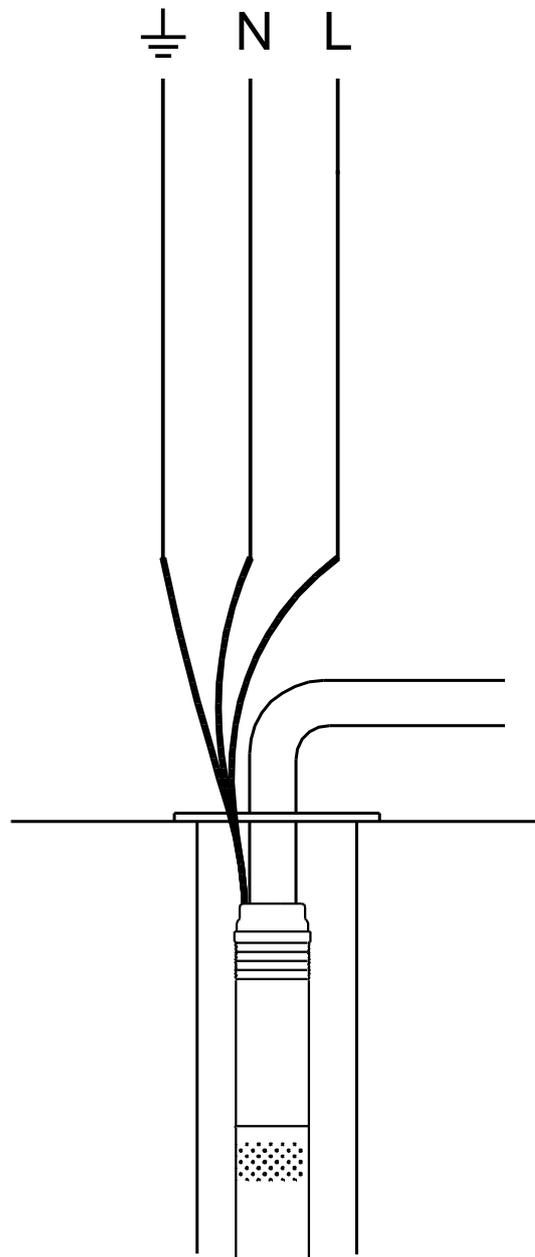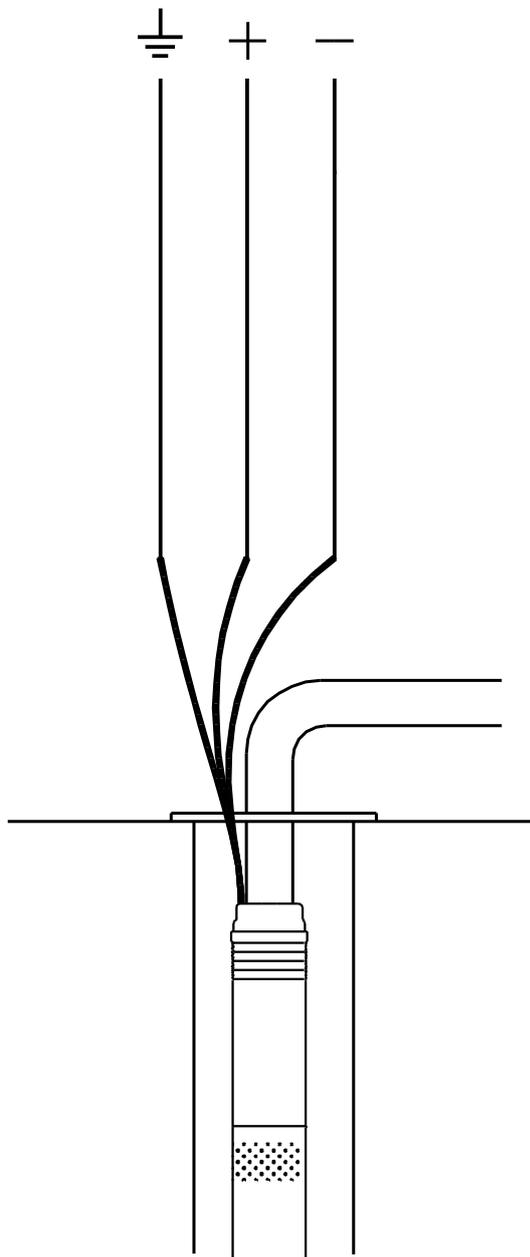

Note! All units are in [mm] unless others are stated.